


DEVICE NAME : QR 9902
Mechanical Data :

Page # : 1 of 1
Date : 12/08/98
ISSUED BY : Joan Low
Rev Date : Index #:

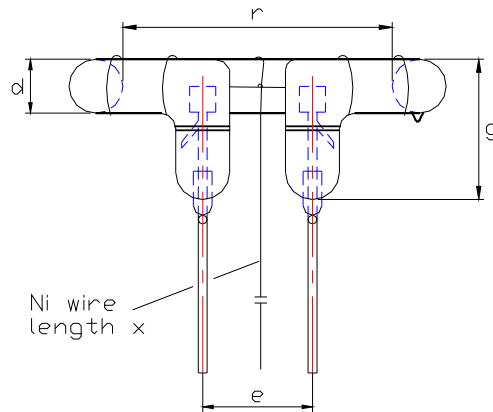

Dimension(mm)

e	19 ± 1.5	l		d	10 ± 0.5 dia
r	59 ± 1 dia	g	20 ± 1	x	

Polarity :

With Colour Corrective Coating : 5550 + 200 / - 100 K

Remarks:

1. Envelope material : B2

Operating Data :

Max. Power Pmax/W		Trigger coil TR	ZS 1052
Nom. Power Pnom / W		Trigger capacitor Cz/μF	0.22
Max. flashenergy Emax/Ws	960	Min. trigger voltage Uz min/V	250
Nom. flashenergy Enom/Ws		Trigger contact S	SCR
Max. anode voltage Uamax/V	1000	Flash frequency/Hz	
Nom. anode voltage Uanom/V	960	Life/Number of flashes/N	10000
Min. anode voltage Uamin/V	600	Repetition rate trep/ s	10
Nom.flash capacitor CB/ μF		Sec trigger voltage Uz sec / KV	- 10.0
Light reduction after life/ %		(Unloaded)	

Remarks :